

MAZIC® CX

MAZIC CX is a POS system optimized for customers in the restaurant and retail industries using the LCM module compared to the MAZIC.



MAZIC® CX Features




LCM modules to reduce TCO



Foldable, Dual hinges



High performance

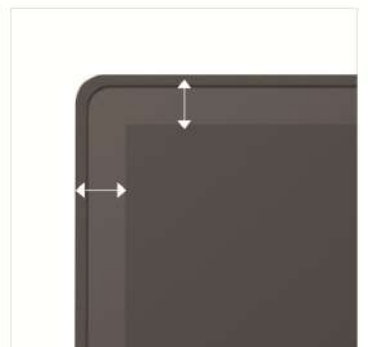

Ultra thin bezel


MAZIC® CX Physical & Environmental | Options & Peripherals

MAZIC® CX	
Physical & Environmental	
Operating Temperature	0 °C ~ 60 °C at 10% to 90% Humidity
Storage Temperature	-20 °C ~ 80 °C at 10% to 90% Humidity
MAZIC® CX-1560	
Dimensions (W x D x H)	(W)368 x (D)230 x (H)395 (mm), (W)14.4 x (D)9.0 x (H)15.5 (in)
Packing Dimensions (W x D x H)	(W)485 x (D)150 x (H)325 (mm) / (W)19 x (D)5.9 x (H)12.7 (in)
Net Weight	5kg, 11.02 lbs.
Packing Weight	5.5kg, 12.13 lbs.
Certification	CE, FCC, KC
Color	Black/White
MAZIC® CX-1500	
Dimensions (W x D x H)	(W)329x (D)230 x (H)428 (mm), (W)12.9 x (D)9.0 x (H)16.8 (in)
Packing Dimensions (W x D x H)	(W)454 x (D)164 x (H)405 (mm), (W)17.8 x (D)15.9 x (H)6.5 (in)
Net Weight	4.5kg, 9.92 lbs.
Packing Weight	5kg, 11.02 lbs.
Certification	CE, FCC, KC
Color	Black/White
MAZIC® CX	
Options & Peripherals	
2nd Displays	9.7" (1024 x 768), 13.3" (1920 x 1080), 10.1" (1280 x 800) LCD Display, Optional Touchscreen
Customer Display	VFD, 20 Columns x 2 Lines
External I/O Box	-
Storage	NVMe M.2 128G
Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track
Smart Card Reader	EMV Level 1
Dallas	Dallas i-button Reader
Fingerprint	Yes
Wall Mount Kit	VESA-Compatible, 75 x 75(mm), 100 x 100(mm)
Speaker	-
WiFi / BT	1. Combo Module, SMT (Factory Option)
TPM	Support


*Specifications may change without prior notice.

MAZIC® Display | Interface

15.6"

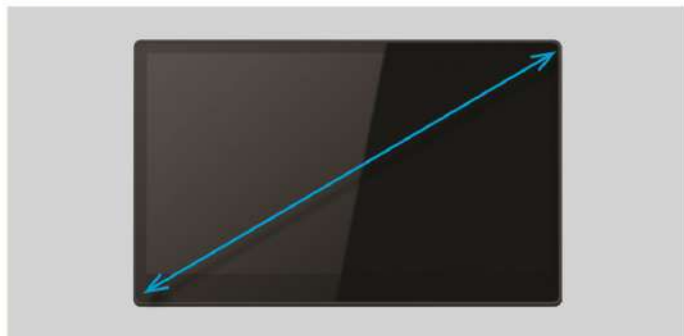

15"

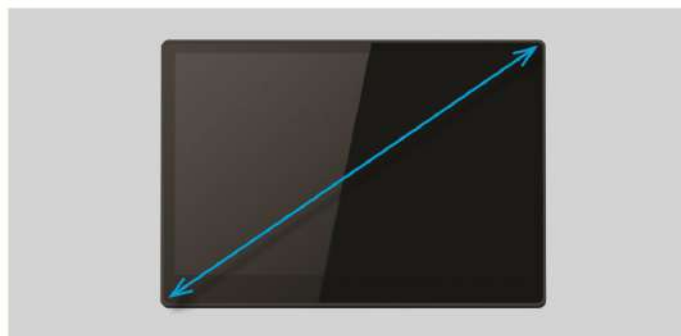

	MAZIC® RL	MAZIC® AP	MAZIC® AN
--	-----------	-----------	-----------

Display

	MAZIC® 1560S RL	MAZIC® 1560S AP	MAZIC® 1560R AN
Type	15.6" TFT LCD, LED Backlight		
Resolution	1920 x 1080		
Brightness	300 cd/m ² (typ.)		
Touchscreen	Projected Capacitive Touch, AF		

	MAZIC® 1500S RL	MAZIC® 1500S AP	MAZIC® 1500R AN
Type	15" TFT LCD, LED Backlight		
Resolution	1024 x 768		
Brightness	400 cd/m ² (typ.)		
Touchscreen	Projected Capacitive Touch, AF		

	MAZIC®RL	MAZIC®AP	MAZIC®AN
--	----------	----------	----------

Interface

Display	Displayport x 2 (MiniDP / USB-C (Alt-Mode))		
USB	9 (Rear 9, USB 3.0 x 2, USB 2.0 x 6, USB C type x 1) 3 (Reserved for MSR, SCR, i-Button/Touch Controller)		
Serial	3 (COM 1 reserved MSR/SCR, TX/RX only) (COM2 reserved CDP, TX/RX only) (COM3 RJ-45, Full Signal)		
CashDrawer Port	RJ-11 x 1 (Integrated circuit GPIO)		
Optinal I/O	-USB 2.0 * 2 (Factory option) Support I/O Expansion Box -Option 1 : 12V Powered USB 2.0 x2 / 24V Powered USB 2.0 x1 / RJ45 x 2 (Full Signal) -Option 2 : 12V Powered USB 2.0 x1 / 24V Powered USB 2.0 x1 / USB 2.0 x 2 / RJ45 x 2 (Full Signal) -Option 3 : 12V Powered USB 2.0 x1 / USB 2.0 x 4 / RJ45 x 2 (Full Signal) -Option 4 : USB 2.0 x 6 / RJ45 x 2 (Full Signal) One option attachable at a time		
LAN	Gigabit Ethernet x 1, RJ-45		
Audio	Line-out(Stereo) x 1, 1W SPK(Mono) x1		
Power DC-IN	USB Type-C		

Power

Power Supply	Adapter 12V, 5A(C-Type Plug)		
--------------	------------------------------	--	--

MAZIC® Physical & Environmental | Options & Peripherals

	MAZIC® RL	MAZIC® AP	MAZIC® AN
Physical & Environmental			
Operating Temperature	0 °C ~ 60 °C at 10% to 90% Humidity		
Storage Temperature	-20 °C ~ 80 °C at 10% to 90% Humidity		
	MAZIC® RL-1560	MAZIC® AP-1560	MAZIC® AN-1560
Dimensions (W x D x H)	(W)368 x (D)230 x (H)395 (mm), (W)14.4 x (D)9.0 x (H)15.5 (in)		
Packing Dimensions (W x D x H)	(W)485 x (D)150 x (H)325 (mm) / (W)19.5 x (D)5.9 x (H)12.7 (in)		
Net Weight	5kg, 11.02 lbs.		
Packing Weight	5.5kg, 12.13 lbs.		
Certification	CE, FCC, KC		
Color	Black/White		
	MAZIC® RL-1500	MAZIC® AP-1500	MAZIC® AN-1500
Dimensions (W x D x H)	(W)329x (D)230 x (H)428 (mm), (W)12.9 x (D)9 x (H)16.8 (in)		
Packing Dimensions (W x D x H)	(W)454 x (D)164 x (H)405 (mm), (W)17.8 x (D)15.9 x (H)6.5 (in)		
Net Weight	4.5kg, 9.92 lbs.		
Packing Weight	5kg, 11.02 lbs.		
Certification	CE, FCC, KC		
Color	Black/White		
	MAZIC® RL	MAZIC® AP	MAZIC® AN
Options & Peripherals			
2nd Displays	9.7" (1024 x 768), 13.3" (1920 x 1080), 10.1" (1280 x 800) LCD Display, Optional Touchscreen		
Customer Display	VFD, 20 Columns x 2 Lines		
External I/O Box	-		
Storage	NVMe M.2 128G		
Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track		
Smart Card Reader	EMV Level 1		
Dallas	Dallas i-button Reader		
Fingerprint	Yes		
Wall Mount Kit	VESA-Compatible, 75 x 75(mm), 100 x 100(mm)		
Speaker	-		
WiFi / BT	1. Combo Module, SMT (Factory Option)		
TPM	Support		

*Specifications may change without prior notice.