



solas

S O L A R S C A L E

Solas is a commercial scale that does not require an external power supply or batteries.

Solas is powered by a solar battery. And, the scale can also be powered manually using the built-in dynamo (electric generator), when required.

The trend and customer needs for products in the markets and stores

where this scale would be used show an increasing consideration for the environment.

The Solas is a commercial scale designed with the environment in mind.

SOLAR POWER

Solar panel with high-density array of crystalline silicon cells brings high conversion efficiency of solar energy to the Solas.



DYNAMO TECHNOLOGY

In addition to the basic solar panel power source, the scale can also be operated using the dynamo to supply power, when required. The platter is removed and placed on the dynamo section. When the platter is pressed, energy is supplied to a storage battery, which drives the operation of the scale.





Solas [DS-785] SPECIFICATION

Capacity	Single-Interval	Max 6kg	Max 15kg	Max 30kg	Max 6lb	Max 15lb	Max 30 lb	Max 60 lb
		e=2g	e=5g	e=10g	e=0.002 lb	e=0.005 lb	e=0.01 lb	e=0.02 lb
	Multi-Interval	3/6kg	6/15kg	15/30kg	3/6lb	6/15 lb	15/30 lb	30/60 lb
		e=1/2g	e=2/5g	e=5/10g	e=0.001/0.002 lb	e=0.002/0.005 lb	e=0.005/0.01 lb	e=0.01/0.02 lb

Display Resolution 1 / 3,000

Loadcell 2.5k resistance loadcel

Power Source Solar Energy or Physical Pressure onto the platter

Operating Condition Temperature : -10°C ~ +40°C / 15 ~ 85% RH



Power Consumption 18mW when using backup lithium battery 3.7V

Dimensions (mm) Overall Size : 273.0(W) x 417.0(D) x 162.7(H)
Platter Size : 252 x 222

Weight (kg) 5.9

Solar Panel Rating OC Voltage : 6V / Size : 186 x 62 mm

Display Dvvice LCD

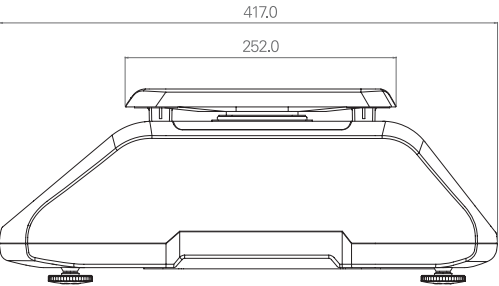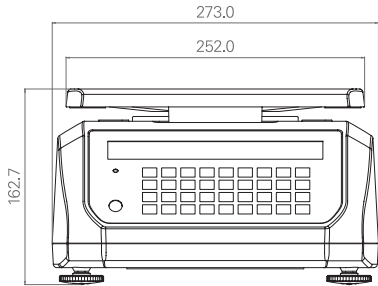

SHANGHAI TERAOKA ELECTRONIC CO., LTD.

TING LIN INDUSTRY DEVELOPMENTAL ZONE
JIN SHAN COUNTY SHANGHAI 201505
+86-21-5723-4888 www.digisystem.com.cn



solas
S O L A R S C A L E